


SPECIFICATION

| | |
|---------------------|-------------------------------|
| TYPE | CONSTANT CURRENT |
| DRIVER CURRENT | 200mA/250mA/300mA/350mA |
| DRIVER VOLTAGE | 26-42V DC |
| DIMMABLE | PHASE DIMMING |
| ELECTRICAL CLASS | CLASS II |
| SUPPLY VOLTAGE | 220-240VAC |
| SUPPLY FREQUENCY | 50/60Hz |
| POWER FACTOR | >0,92 (230VAC, FULL LOAD) |
| MIN. OUTPUT POWER | 5,2W |
| MAX. OUTPUT POWER | 14,7W |
| INRUSH CURRENT | ≤20A/10US (230VAC, FULL LOAD) |
| IP RATING | IP20 |
| WORKING TEMPERATURE | -25 ... +50°C |
| CONNECTION TYPE | PUSH-IN TERMINAL |
| LENGTH (mm) | 125 |
| WIDTH (mm) | 41 |
| HEIGHT (mm) | 23 |
| MANUFACTURER | KGP |
| MODEL NUMBER | CC15W200-350CG TRIAC |

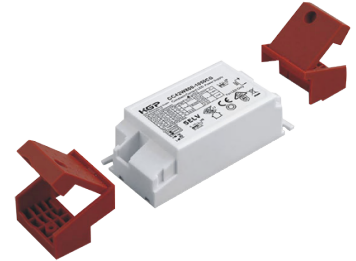

Please note that all drivers must be programmed by an authorized installer according to the desired LED.