

Name  
Number  
Collection

**SPREADERLIGHT 230V  
N030  
NAUTIC**

**TEKNA**

### General


Location	Indoor / Outdoor
Mail Material	Brass / Glass
IP rating	IP65
Class	I
Bathroom zone	Zone 3
Voltage	230V
Driver required	.
Cable Length (m)	.
Dimensions (mm)	80x130x85.5
Mounting method	Wall mounting
Gross Weight (kg)	1
Packaging (mm)	180x150x90
Energy efficiency	



### Lamp

Light source	LED module
Number of light sources	1
Socket type	.
Bulb shape	COB
Max lamp length (mm)	.
Power consumption	4W
Luminous flux	304lm
Color temperature	2700K
CRI	80
Lifetime	.
Beam angle	130°

Included

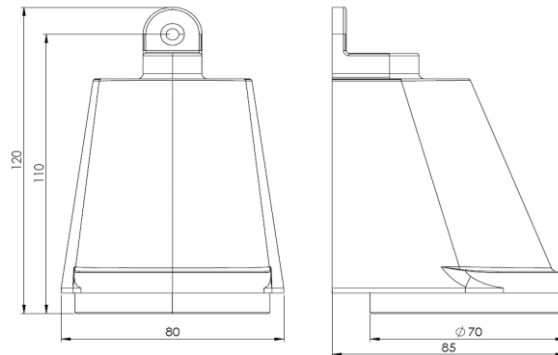

### Electrical

Switch (type)	.
Battery	No
Dimmable	Yes
Dimming range	.
Dimming method	Phase Dimming
Supply frequency	50/60 Hz
Driver voltage	230V
Efficiency	.

### Finishes

