


Name **SPREADERLIGHT 12V LED**
 Number **N028**
 Collection **NAUTIC**

TEKNA

General


Location Indoor/outdoor
 Main material Brass/glass
 IP rating IP 44
 Class II/III
 Bathroom zone Zone 2
 Voltage 12V AC/DC
 Driver required .
 Cable length (m) .
 Dimensions (mm) 80x130x85.5
 Mounting method Wall mounting
 Gross weight (kg) .
 Net weight (kg) .
 Packaging (mm) .
 Energy Efficiency % .

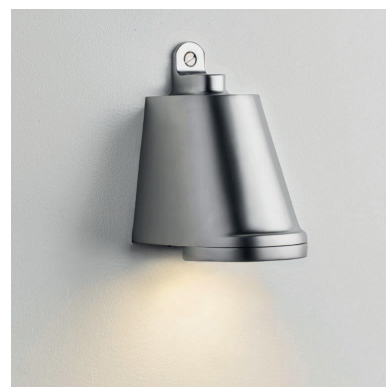

Lamp


Included

Light source LED Sora MR16
 Number of light sources 1
 Socket type MR16-GU5.3
 Bulb shape .
 Max lamp length (mm) .
 Power consumption 9W
 Luminous flux 450lm
 Color temperature 3000K
 CRI 95
 Lifetime 35.000h
 Beam angle 36°

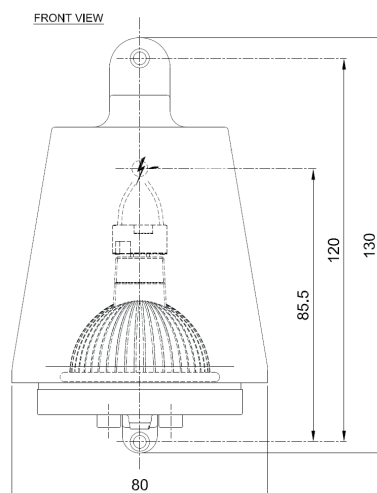





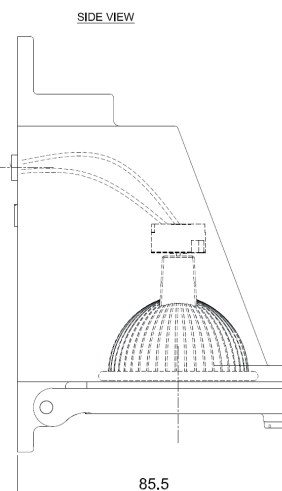

Electrical

Switch (type) .
 Battery No
 Dimmable Yes
 Dimming range .
 Dimming method .
 Supply frequency 50Hz / 60Hz
 Driver/ballast voltage 12V
 Efficiency .



Finishes

 Acid Green
 Brushed Chrome Plated Brass
 Dark Bronze
 Polished Brass
 Polished Chrome Plated Brass
 Rough Dark Bronze