


Name **SPREADERLIGHT 12V LED**  
 Number **N028**  
 Collection **NAUTIC**

**TEKNA**

## General


Location Indoor/outdoor  
 Main material Brass/glass  
 IP rating IP 44  
 Class II/III  
 Bathroom zone Zone 2  
 Voltage 12V AC/DC  
 Driver required .  
 Cable length (m) .  
 Dimensions (mm) 80x130x85.5  
 Mounting method Wall mounting  
 Gross weight (kg) .  
 Net weight (kg) .  
 Packaging (mm) .  
 Energy Efficiency % .

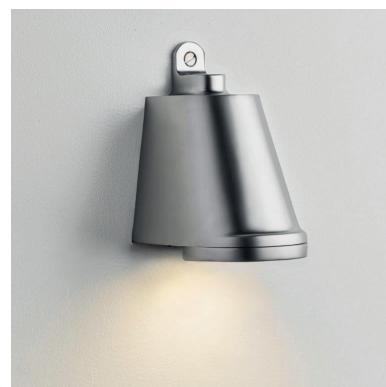

## Lamp


Included

Light source LED Sora MR16  
 Number of light sources 1  
 Socket type MR16-GU5.3  
 Bulb shape .  
 Max lamp length (mm) .  
 Power consumption 9W  
 Luminous flux 450lm  
 Color temperature 3000K  
 CRI 95  
 Lifetime 35.000h  
 Beam angle 36°

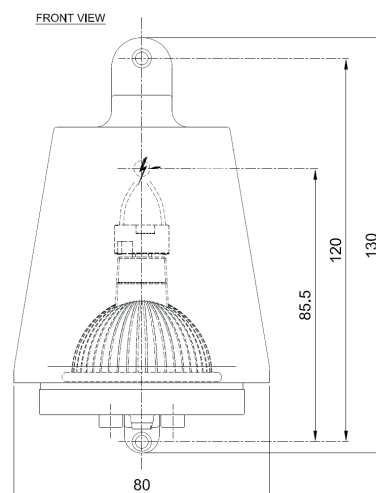



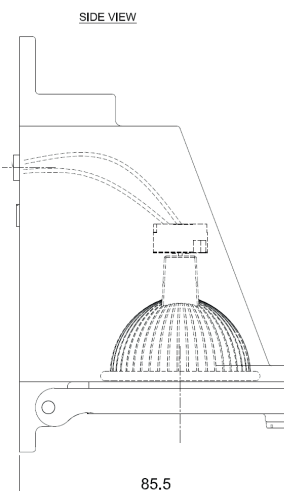


## Electrical

Switch (type) .  
 Battery No  
 Dimmable Yes  
 Dimming range .  
 Dimming method .  
 Supply frequency 50Hz / 60Hz  
 Driver/ballast voltage 12V  
 Efficiency .



## Finishes

 Brushed Chrome Plated Brass  
 Dark Bronze  
 Polished Brass  
 Polished Chrome Plated Brass  
 Rough Dark Bronze