Name	**SPREADERLIGHT 230V**
Number	**N030**
Collection	**NAUTIC**

General

Location	Indoor / Outdoor Brass /
Mail Material	Glass
IP rating	IP65
Class	I
Bathroom zone	Zone 2
Voltage	230V
Driver requiered	.
Cable Length (m)	.
Dimensions (mm)	80x130x85.5
Mounting method	Wall mounting
Gross Weight (kg)	1,3kg
Packaging (mm)	180x150x90
Energy efficiency	.

Lamp

	Included
Light source	LED module
Number of light sources	1
Socket type	.
Bulb shape	COB
Max lamp length (mm)	.
Power consumption	4W
Luminous flux	304lm
Color temperaure	2700K
CRI	80
Lifetime	.
Beam angle	130°

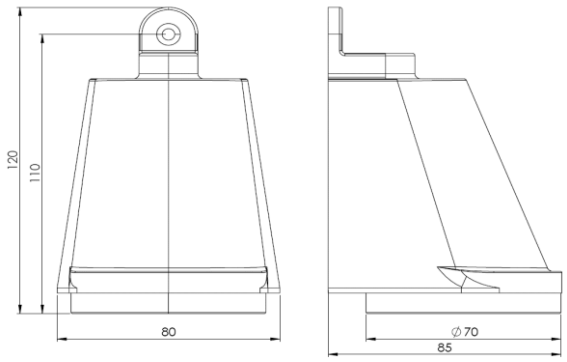

Electrical

Switch (type)	.
Battery	No
Dimmable	Yes
Dimming range	.
Dimming method	Phase Dimming
Supply frequency	50/60 Hz
Driver voltage	230V
Efficiency	.

Finishes

- Brushed Chrome Plated Brass (CRM)
- Dark Bronze (DBR)
- Polished Brass (BRP)
- Polished Chrome Plated Brass (CRP)
- Rough Dark Bronze (RBR)
- Vintage Brass (BRV)
- Sateen Brass (BRM)

Glass

Frosted glass (MG)

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance of function of the product.