


Name **SPREADERLIGHT 230V**
 Number **N030**
 Collection **NAUTIC**

TEKNA

General

Location Indoor/outdoor
 Main material Brass/glass
 IP rating IP 65
 Class I
 Bathroom zone Zone 3
 Voltage 230V
 Driver required .
 Cable length (m) .
 Dimensions (mm) 80x130x85.5
 Mounting method Wall mounting
 Gross weight (kg) .
 Net weight (kg) .
 Packaging (mm) .
 Energy Efficiency % .

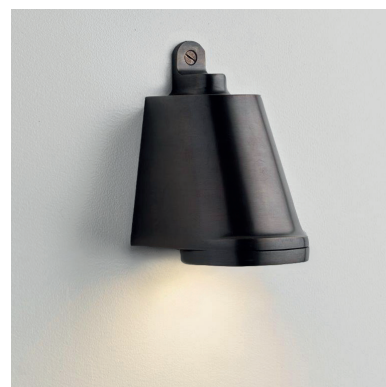







Lamp

Included
 Light source LED module
 Number of light sources 1
 Socket type .
 Bulb shape COB
 Max lamp length (mm) .
 Power consumption 4W
 Luminous flux 360lm
 Color temperature 2700K
 CRI 80
 Lifetime .
 Beam angle 130°

Electrical

Switch (type) .
 Battery No
 Dimmable Yes
 Dimming range .
 Dimming method Phase dimming
 Supply frequency 50Hz / 60Hz
 Driver/ballast voltage 220-240V
 Efficiency .

Finishes

-  Acid Green
-  Brushed Chrome Plated Brass
-  Dark Bronze
-  Polished Brass
-  Polished Chrome Plated Brass
-  Rough Dark Bronze

